


# F-11

## 11MM INDOOR/OUTDOOR TRANSPARENT LED VIDEO DISPLAY

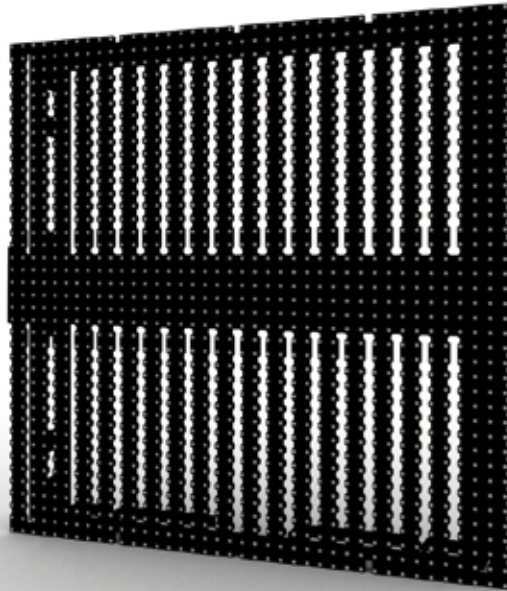

The ultra-lightweight, virtually transparent F-11 LED display offers a cost-efficient high-resolution LED solution. This high-brightness screen is ideal for indoor and outdoor use.

Weighing a minimal 3 kg/6.61 Lbs per tile, the F-11 is ideally suited to demanding, applications in which both image quality and weight form key performance parameters. The F-11 is a reliable work-horse that can be put to a myriad of uses!

### Key benefits:

- High performance and affordable → Enter new markets, greater ROI
- Lightweight → Increases design possibilities and reduces costs
- Integrated shutter → Manual switch to make transparent or not
- Transparency → Combine video with lighting
- Indoor/Outdoor → Greater ROI for rental companies
- 5,500 light output/IP66 rating → Outdoor use
- Radiant Calibration → Superb color uniformity


# PIXLED

Lightweight | Creative LED solutions

# F-11 SPECIFICATIONS\*

## 11MM INDOOR/OUTDOOR TRANSPARENT LED VIDEO DISPLAY

	<b>F-11</b>
Pixel pitch	11,25mm
Brightness (Nit or cd/m <sup>2</sup> )	5500
Transparency	10% or no
LED type /Brand	3 in 1 SMD /Nichia
LED/Pixel	1
Calibration system	Radiant
Module size (cm) W x H x D	45 x 45 x 6
Module size (ft) W x H x D	1.48 x 1.48 x 0.2
Module area	0,2m <sup>2</sup> / 2.15ft <sup>2</sup>
Pixels / Module	40 x 40
Pixels / m <sup>2</sup>	7.901
Viewing Horizontal / Vertical	>160° / >160°
Weight/tile	3 kg / 6.61 Lbs
Weight/m <sup>2</sup>	15 kg / 33.07 Lbs
IP Front / Back	IP65 / IP54
Colors	4.4 Trillion
Processing	1.600 x 1.200
Input frequency	60 Hz
Refresh rate	360Hz
Data interconnect	BNC
Processor	PB-100
Max power/tile (W)	485
Max power/m <sup>2</sup> (W)	2.425
Certificats	CE/UL
Temperature	0 to 40°C / 32 to 104°F

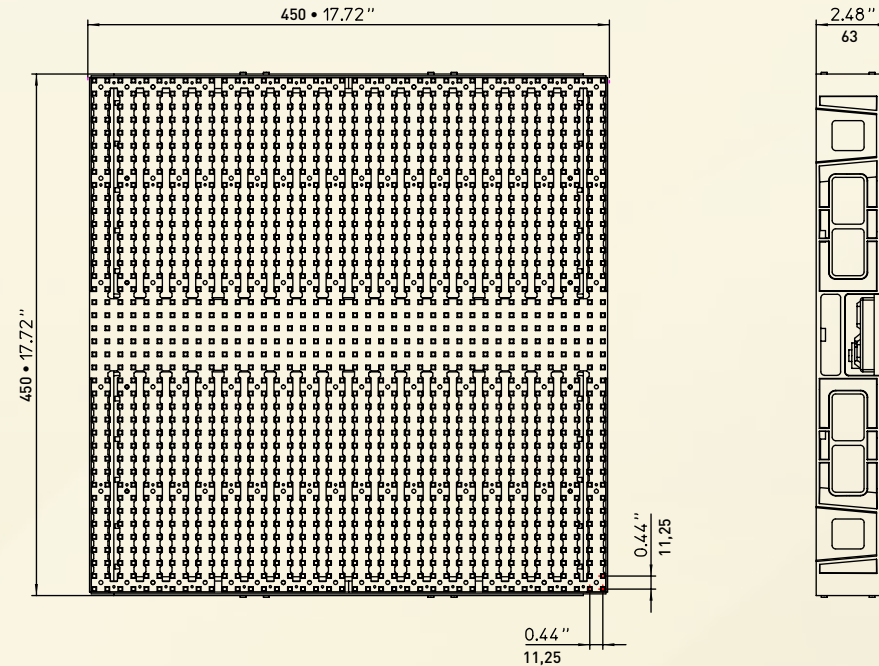

Phone Europe: +32 59 33 99 10  
 Phone US: +1 888 349 8321  
 Web: [www.pixled.com](http://www.pixled.com)  
 Email: [info@pixled.com](mailto:info@pixled.com)



\*Specifications subject to change without notice