


F-7Ultralight

7MM INDOOR/OUTDOOR LED VIDEO DISPLAY

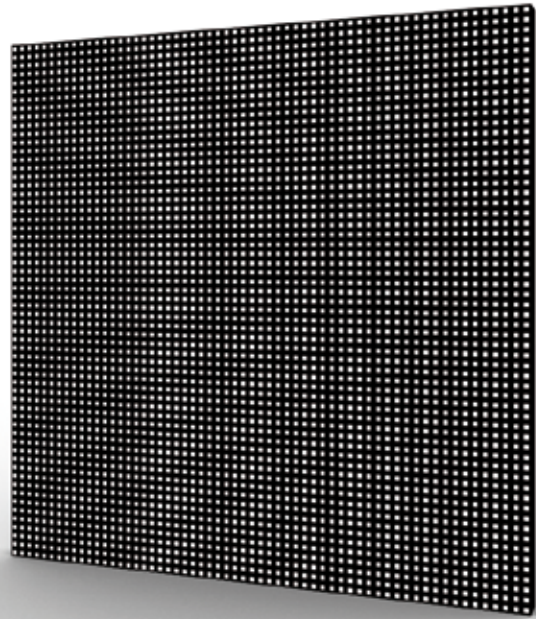

2009 Pink Concert

The F-7U brings a whole new dimension to LED display technology. With its 7,5 mm pixel pitch and revolutionary “Black Surface” Nichia LEDs the display offers outstanding image integrity and most intense contrast levels – even in the most demanding daylight applications.

Coupled with its ultra-lightweight design of less than 4 kg /8.82 Lbs per tile, exceptional viewing angles and IP65 rating, the F-7U offers a high resolution LED display that is ideal for demanding indoor and outdoor applications where every detail matters.

Key benefits:

Key benefits:

- High performance and affordable → Enter new markets, greater ROI
- Lightweight → Increases design possibilities/reduces costs
- Indoor/Outdoor → Greater ROI for rental companies
- Nichia Black LED in SMD → Deep black levels/outstanding contrast/wide viewing angles
- 3,800 light output/IP65 rating → Outdoor use
- Radiant Calibration → Superb color uniformity


PIXLED

Lightweight | Creative LED solutions

F-7U **ultralight** SPECIFICATIONS*

7MM INDOOR/OUTDOOR LED VIDEO DISPLAY

	F-7U
Pixel pitch	7,5mm
Brightness [Nit or cd/m ²]	3800
Transparency	No
LED type /Brand	3 in 1 SMD /Black Nichia
LED/Pixel	1
Calibration system	Radiant
Module size [cm] W x H x D	45 x 45 x 6
Module size [ft] W x H x D	1.48 x 1.48 x 0.2
Module area	0,2m ² / 2.15ft ²
Pixels / Module	60 x 60
Pixels / m ²	17.777
Viewing Horizontal / Vertical	>160° / >160°
Weight/tile	4 kg / 8.82 Lbs
Weight/m ²	20 kg / 44.09 Lbs
IP Front / Back	IP65 / IP54
Colors	4.4 Trillion
Processing	1.600 x 1.200
Input frequency	60 Hz
Refresh rate	300Hz
Data interconnect	BNC
Processor	PB-270
Max power/tile (W)	500
Max power/m ² (W)	2.500
Certificats	CE/UL
Temperature	0 to 40°C / 32 to 104°F

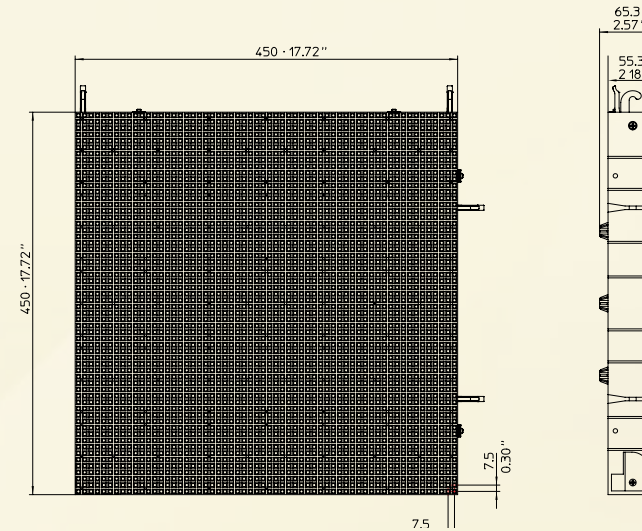

Phone Europe: +32 59 33 99 10
 Phone US: +1 888 349 8321
 Web: www.pixled.com
 Email: info@pixled.com



*Specifications subject to change without notice