


F-11

11MM INDOOR/OUTDOOR TRANSPARENT LED VIDEO DISPLAY

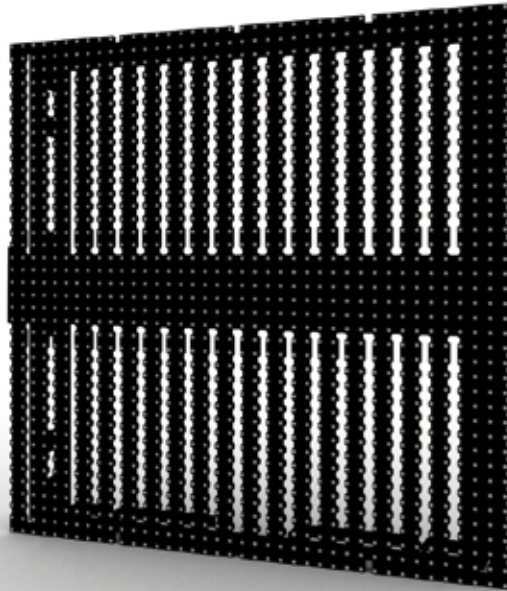

The ultra-lightweight, virtually transparent F-11 LED display offers a cost-efficient high-resolution LED solution. This high-brightness screen is ideal for indoor and outdoor use.

Weighing a minimal 3 kg/6.61 Lbs per tile, the F-11 is ideally suited to demanding, applications in which both image quality and weight form key performance parameters. The F-11 is a reliable work-horse that can be put to a myriad of uses!

Key benefits:

- High performance and affordable → Enter new markets, greater ROI
- Lightweight → Increases design possibilities and reduces costs
- Integrated shutter → Manual switch to make transparent or not
- Transparency → Combine video with lighting
- Indoor/Outdoor → Greater ROI for rental companies
- 6,500 Nit light output/IP65 rating → Outdoor use
- Radiant Calibration → Superb color uniformity


PIXLED

Lightweight | Creative LED solutions

F-11 SPECIFICATIONS*

11MM INDOOR/OUTDOOR TRANSPARENT LED VIDEO DISPLAY

	F-11
Pixel pitch	11,25mm
Brightness (Nit or cd/m ²)	6.500 Full white
Transparency	10% or no
LED type /Brand	3 in 1 SMD /Nichia
LED/Pixel	1
Calibration system	Radiant
Module size (cm) W x H x D	45 x 45 x 6
Module size (ft) W x H x D	1.48 x 1.48 x 0.2
Module area	0,2m ² / 2.15ft ²
Pixels / Module	40 x 40
Pixels / m ²	7.901
Viewing Horizontal / Vertical	>145° / >145°
Weight/tile	3 kg / 6.61 Lbs
Weight/m ²	15 kg / 33.07 Lbs
IP Front / Back	IP65 / IP65
Colors	4.4 Trillion
Processing	1.600 x 1.200
Input frequency	50 / 60 Hz
Refresh rate	360Hz
Data interconnect	BNC
Processor	PB-100
Max power/tile (W)	260
Max power/m ² (W)	1.300
Certificates	CE/UL
Temperature	0 to 40°C / 32 to 104°F

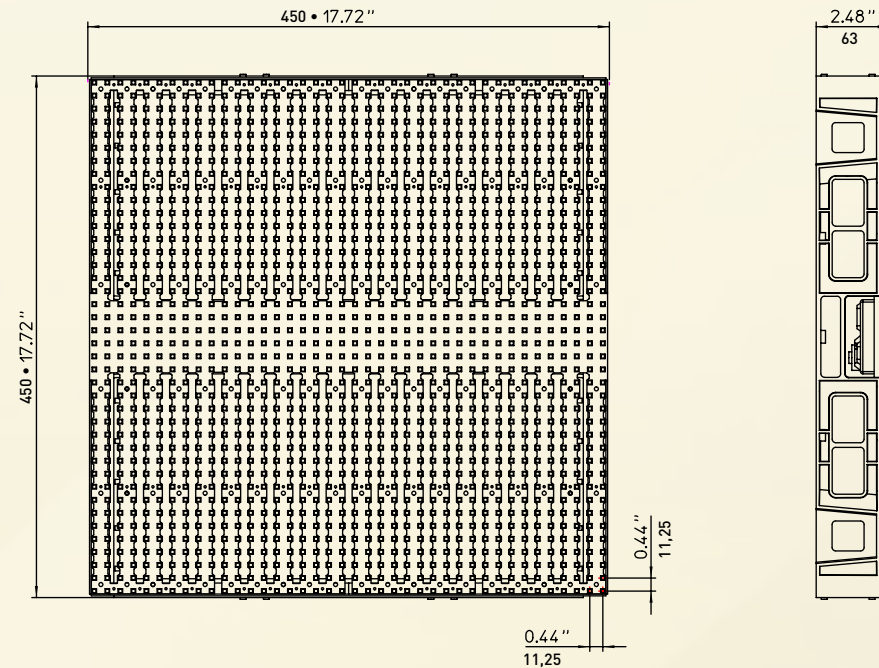

Phone Europe: +32 59 33 99 10
 Phone US: +1 888 349 8321
 Web: www.pixled.com
 Email: info@pixled.com



*Specifications subject to change without notice