


F-30

30MM INDOOR/OUTDOOR TRANSPARENT LED VIDEO DISPLAY

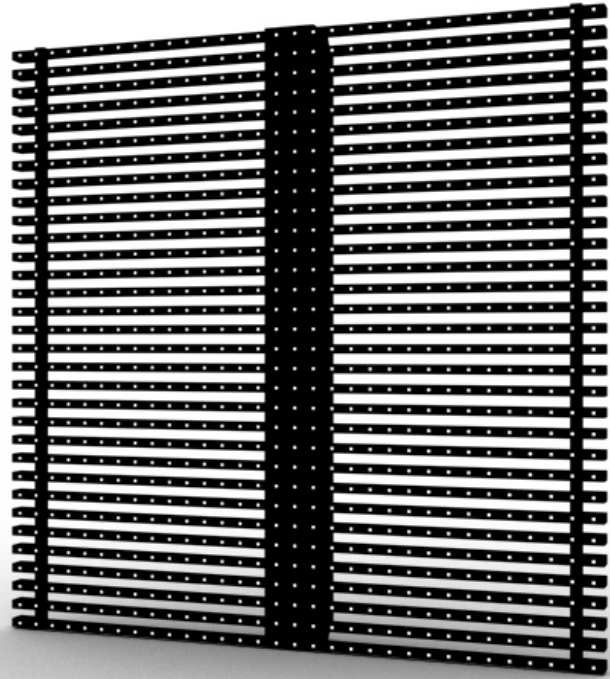

2009 Johnny Hallyday Concert

The Pixled F-30 offers a lightweight, virtually transparent LED display that is ideal for both indoor and outdoor use in a wide array of applications. With its 30mm pixel pitch, 2000 Nit output and rugged IP65 rating, the F-30 is the perfect solution for all applications with large viewing distances.

The F-30 also offers wide viewing angles with excellent image integrity and color uniformity. With its low weight, virtual transparency and has proven reliability the F-30 offers you a cost-effective total display solution.

Key benefits:

- High performance and affordable → Enter new markets, greater ROI
- Lightweight → Increases design possibilities/reduces costs
- Transparency → Combine video with lighting
- Indoor/Outdoor → Greater ROI for rental companies
- SMD technology → Quality image with wide viewing angles
- IP65 rating → Outdoor use


PIXLED

Lightweight | Creative LED solutions

F-30 SPECIFICATIONS*

30MM INDOOR/OUTDOOR TRANSPARENT LED VIDEO DISPLAY

	F-30
Pixel pitch	30mm
Brightness [Nit or cd/m ²]	2000
Transparency	50%
LED type /Brand	3 in 1 SMD/SDK
LED/Pixel	1
Module size (cm) W x H x D	96 x 96 x 13
Module size (ft) W x H x D	3.15 x 3.15 x 0.43
Module area	0,92m ² / 9.9ft ²
Pixels / Module	32 x 32
Pixels / m ²	1.111
Viewing Horizontal / Vertical	>120° / >120°
Weight/tile	10,85 kg / 23.92 Lbs
Weight/m ²	11,8 kg / 26.01 Lbs
IP Front / Back	IP65 / IP54
Colors	68 Billion
Processing	1.280 x 1.024
Input frequency	60 Hz
Refresh rate	1000Hz
Data interconnect	BNC
Processor	PK-V3
Max power/tile (W)	300
Max power/m ² (W)	330
Certificats	CE/ETL
Temperature	-20 to 50°C / -4 to 122°F

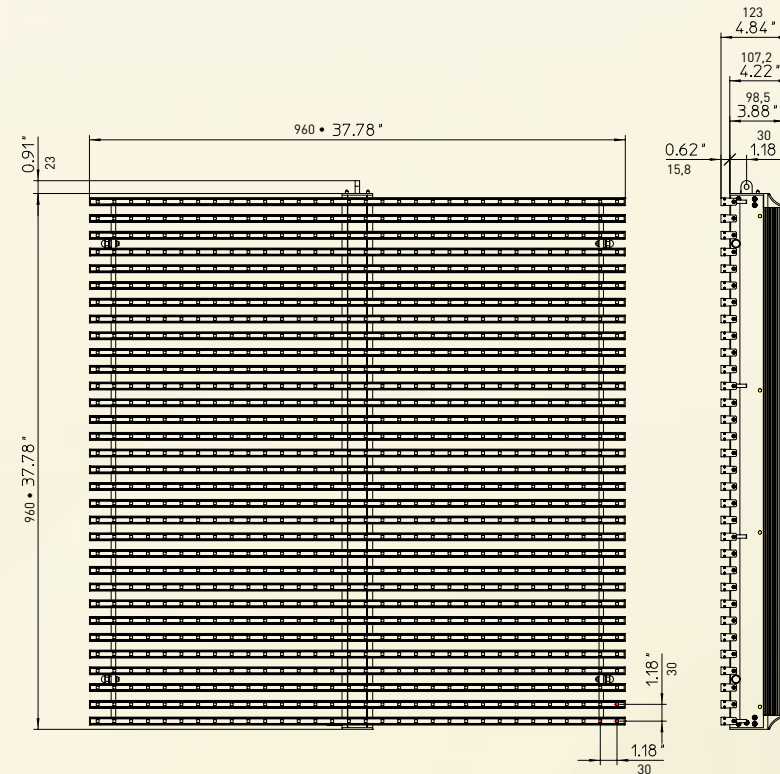

Phone Europe: +32 59 33 99 10
 Phone US: +1 888 349 8321
 Web: www.pixled.com
 Email: info@pixled.com



*Specifications subject to change without notice